


Eyebolt DIN

Eyebolts DIN580 are for general use applications, and commonly utilised as a removable lifting point where a rated female thread can be used as a termination.

- Made from C15 carbon steel with zinc plated finish, manufactured with a standard larger eye.
- Conforms to DIN 580 and DIN582
- Test certificates are available on request

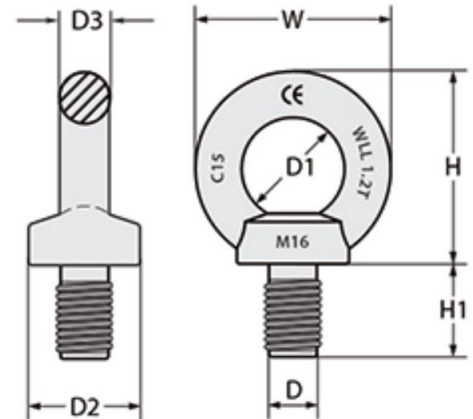

Part No.	Size (mm)	WLL Axial (tonnes)	WLL Side 90 (tonnes)	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H (mm)	H1 (mm)	W (mm)	Weight (kg)
3110006	6	0.09	0.018	6	20	20	8	36	13	36	0.055
3110008	8	0.14	0.035	8	20	20	8	36	13	36	0.06
3110010	10	0.23	0.058	10	25	25	10	45	17	45	0.1
3110012	12	0.34	0.085	12	30	30	12	53	20	54	0.19
3110016	16	0.7	0.175	16	35	35	14	62	27	63	0.31
3110020	20	1.2	0.3	20	40	40	16	71	30	72	0.45
3110022	22	1.5	0.75	22	40	40	16	71	30	72	0.68
3110024	24	1.8	0.45	24	50	50	20	90	36	90	0.72
3110027	27	2.5	0.625	27	54	61.4	22	99	40	98	1.16
3110030	30	3.6	0.9	30	60	65	24	109	45	108	1.6
3110036	36	5.1	1.275	36	70	75	28	128	54	126	2.8
3110042	42	7	1.75	42	80	85	32	147	63	144	4.2
3110048	48	8.6	2.15	48	90	100	38	168	68	166	6.36
3110056	56	11.5	2.875	56	100	110	42	187	78	184	11.5

HEAD OFFICE

A. 4 Christensen Rd, Yatala Q 4207
T. 07 3801 6565
W. stenhouselifting.com.au
E. sales@stenhouselifting.com.au

YATALA 07 3801 6565
MARYBOROUGH 07 4122 1193
WACOL 07 3728 4545

