


Chain Sling Inspection

How to inspect before use

Ensure your safety, the safety of your site and teammates when conducting inspections. All inspections of chain slings shall be conducted in accordance with the relevant Standards.

Inspect all the components of the Chain Sling Assembly thoroughly

1. Working Load Limit Tag/Mandatory Markings Tag

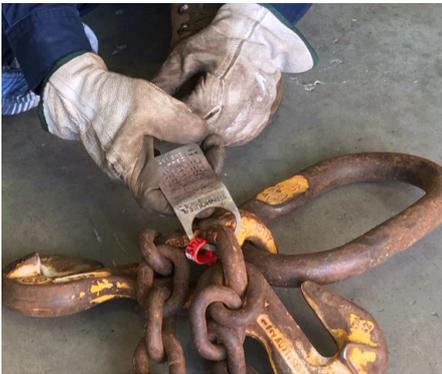


2. Master Link



3. Connecting Link/s



4. Shortening Hook/s

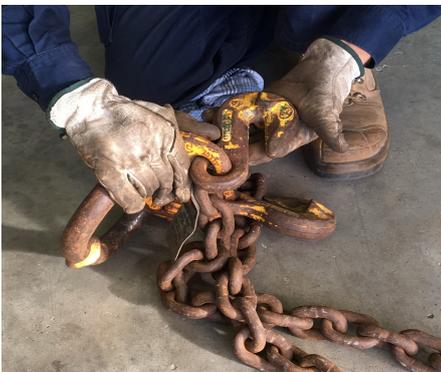

5. Chain



5. Hook/s (Lower terminal device)



what to look for

Bent, Corroded, Cracked, Cut, Deformed, Distorted, Gouged, Heat Damage, Nicked, Seized, Unreadable, Worn.

NOTE: Pay particular attention to the load bearing pins and points.

If any doubt is raised regarding the Chain Sling NOT being fit for service, tag accordingly and contact us on 3801 6565.

HEAD OFFICE

A. 4 Christensen Rd, Yatala Q 4207

T. 07 3801 6565

W. stenhouiselifting.com.au

EAGLE FARM 07 3473 2453

MARYBOROUGH 07 4122 1193

WACOL 07 3728 4545

