


Swivel Lifting Point

Swivel lifting points are used in a wide variety of industrial lifting applications and are ideal for machinery and various lifting and lashing applications.

- 360 swivel with 180 pivot function
- Rated at 100% at 90 angle
- Bolts are metric thread grade 10.9 alloy socket head screw

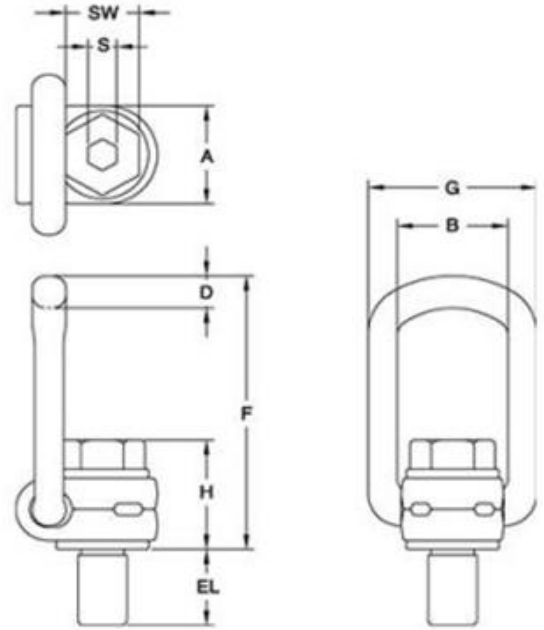

Part No.	WLL (tonnes)	Torque in Nm	B (mm)	EL (mm)	L1 (mm)	A (mm)	G (mm)	D (mm)	F (mm)	H (mm)	S (mm)	Weight (kg)
168101	M8 0.3t	30	35	11	45	30	55	10	85	35	6	0.2
168102	M10 0.63t	60	35	16	50	30	55	10	85	36	8	0.3
168103	M12 1.0t	100	37	18	60	33	57	13.5	98	44	8	0.5
168104	M16 1.5t	150	37	24	60	33	57	13.5	98	46	10	0.5
168105	M20 2.5t	250	54	30	80	50	82	16.5	140	57	12	1.3
168106	M24 4.0t	400	54	36	85	50	82	16.5	140	59	14	1.4
168107	M27 5.0t	400	65	38	110	60	99	22.5	170	79	17	2.8
168108	M30 5.0t	500	65	48	115	60	99	22.5	170	81	17	3.1
168109	M36 7.0t	700	65	54	125	60	99	22.5	178	88	22	3.3
168110	M36 8.0t	800	85	62	140	77	124	26.5	225	101	22	5.8
168111	M42 10.0t	1000	85	72	150	77	124	26.5	225	104	24	6.3
168112	M42 15.0t	1500	104	63	150	95	158	36	261	117	24	10.9
168113	M48 20.0t	2000	104	72	160	95	158	36	261	121	27	11.6

HEAD OFFICE

A. 4 Christensen Rd, Yatala Q 4207
T. 07 3801 6565
W. stenhouselifting.com.au
E. sales@stenhouselifting.com.au

YATALA 07 3801 6565
MARYBOROUGH 07 4122 1193
WACOL 07 3728 4545

